Vertix recycling

TECHNICAL DATA SHEET

Vertix LLC 13425 Worthington Rd. New Albany, OH 43054

VX² Mixed

IM Grade Mixed Color Copolymer
High Density Polyethylene
Post-Consumer Resin

PROPERTY	TEST METHOD	NOMINAL VALUES
Melt Flow	ASTM-D1238	1.50g/10 minutes
Specific Gravity	ASTM-D792	0.955 g/mL
Flexural Modulus	ASTM-D790	150,000 psi
Tensile Yield Strength	ASTM-D698	4,600 psi
Notched Izod Impact	ASTM-D256	70 J/m
Moisture	ASTM-D6980	0.03%


CHARACTERSTICS

Mixed Color

APPLICATIONS

Molding, injection, or extrusion of plastic parts

NOTE: The information provided in this Technical Data Sheet (TDS) is believed to be accurate as of the date issued and obtained from sources which are believed to be reliable. No warranty, either express or implied, is given regarding the information contained within this document and Vertix LLC assumes no liability resulting from the use of this product or reliance on the information in this TDS.

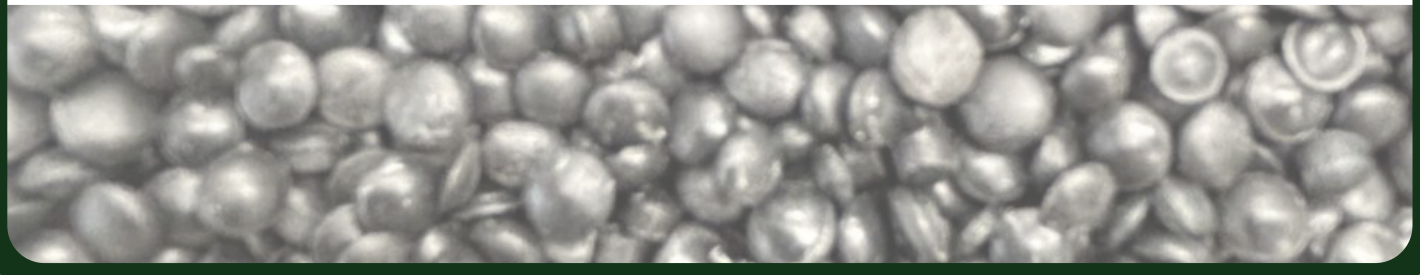

© COPYRIGHT 2026-27 BY VERTIX LLC